

The Landmaster
SPRAYING EQUIPMENT



High Pressure Spraying Equipment for rowcrop, bush or orchard spraying.

BYRON HORTICULTURAL ENGINEERING LIMITED
HUCKNALL, NOTTINGHAM, ENGLAND

Phone : Hucknall 643/4.

Grams : Horta, Hucknall.

The Landmaster


ROTARY HOE



"As strong as a Lion and as docile as a Lamb"

The Landmaster


WITH TOOL BAR

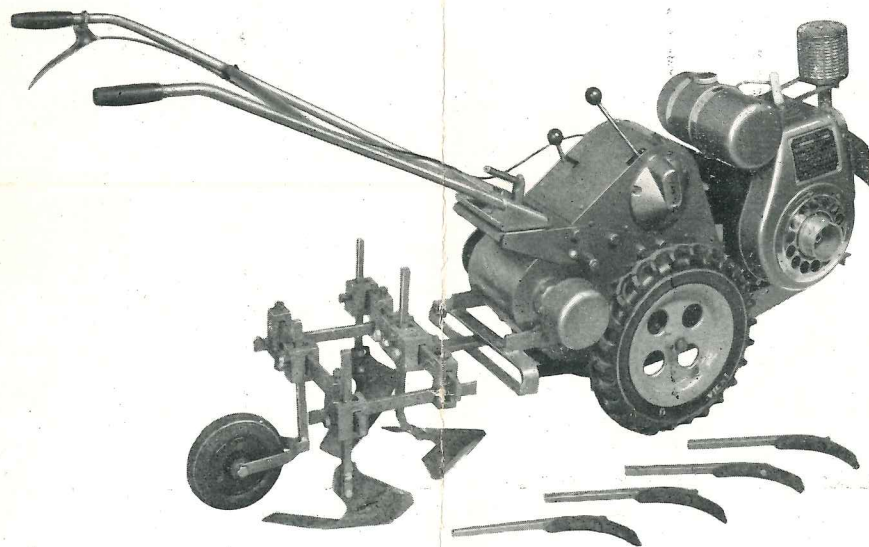

The forward mounted swivel Tool Bar may be used either fixed or to swivel. It has complete universal adjustment in all directions. The Tool Bar is supplied complete with four reversible tines, two 10 in. side hoes and one centre sweep.

The Landmaster

ROTARY HOE

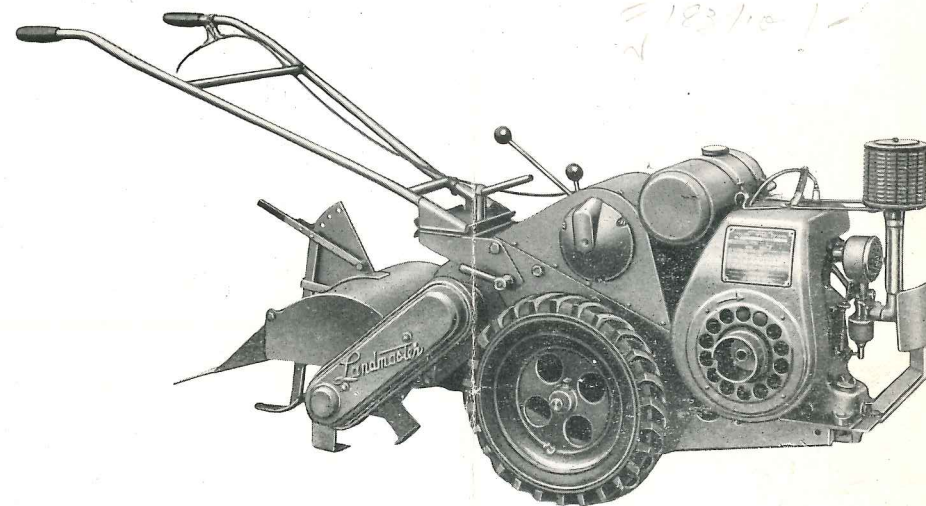

SPECIFICATION

ENGINE: Villiers Mark 20, 4 stroke, 208 c.c. Automatic governor controlled. Horse power: 2 h.p. at 2,000 r.p.m., 2½ h.p. at 2,500 r.p.m. Recommended speed range 2,000 to 2,500 r.p.m.

TRANSMISSION: Chain drive through Albion three-speed Gearbox with single plate clutch. Final drive to Rotary Hoe by heavy Duplex chain. A Dunlop Macbeth shock absorber is incorporated in the transmission.

WHEELS: 3.00-10. Pneumatic track grip tyres. Heavy Hi-duty cast iron wheels are available as extras.

HANDLEBARS: Quickly adjustable for height and may be swung to either side.

ROTARY HOE: 14 in. wide, fitted with eight hoes.

FILTER: A.C. Oil Bath or Vokes Micro Vee Filters.


WIDTH: Over-all width of machine: 18½ in. Wheel track 14 in. adjustable to 17½ in.

WEIGHT: With pneumatics: 308 lbs.

The Manufacturers reserve the right to alter the specification without notice.

The Landmaster

WITH CUTTER BAR

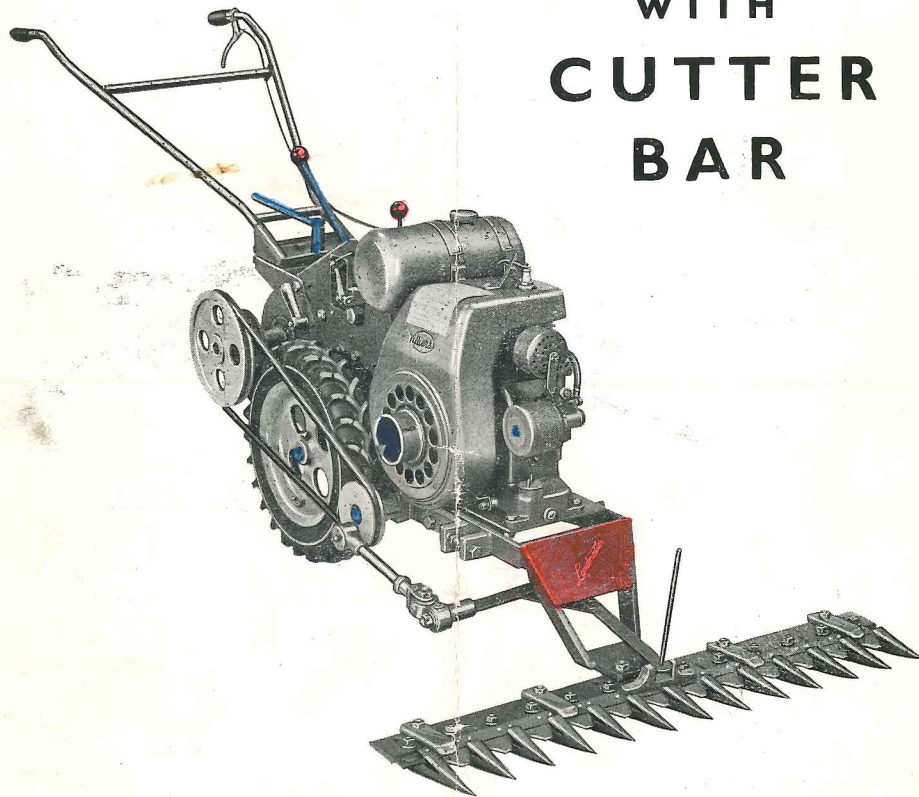

3 ft. wide Cutter Bar driven by a Vee Rope drive from the rear power take-off. It is quickly and easily attached to the Tractor.

The Landmaster

ROTARY HOE with RIDGER

This illustration shows the "LANDMASTER" with the Ridger fitted in place of the Rotary Hoe Depth Control. When this tool is used along with the Rotary Hoe an excellent job is made of cultivating and ridging in one operation.



ADDITIONAL EQUIPMENT

The "Landmaster" PLOUGH. This is a light implement designed for use with the tractor only and is suitable for use in light soils. A screw type depth control is incorporated.

The "Landmaster" RIDGER. This incorporates the Ridger Body as illustrated above, but for use without the Rotary Hoe. The screw type depth control is interchangeable with that used on the Plough.

HEDGETRIMMING ATTACHMENT. A 110 volt 400 watt generator is mounted in front of the engine and is driven by Vee belt. A Tarpen electric hedgetrimmer with ample cable is supplied and the generator will provide sufficient power for two such trimmers.

The Landmaster **TRAILER**



The Trailer is steel framed with timber body and is mounted on 16"x 4" pneumatic wheels.

Body size - 2'6"x 4'6"x 12".

Suitable for loads up to 10 cwts.

The Landmaster **WITH SEEDER**



The "LANDMASTER" Seed Drill fitted to the Tool Bar of the Tractor. The Seeder has a capacity of 19 pints and the flow of the seed is controlled by a single lever. The Seeder will sow from the smallest seeds up to peas and beans (French).